




Ideal for use in blind assemblies.

These particular sealing rings are designed for applications that require passing counter bores and retaining ring grooves. Use when restricting ring movement is necessary during assembly.

SIZE RANGES



0.75" 19.05mm

90"

2286mm

MATERIALS

- Cast Iron
- PEEK
- Ductile Iron
- Ni-Resist
- Bronze
- PTFE
- Stainless Steel Nickel-Based Alloys
- Steel


Quality and Inovation Since 1929









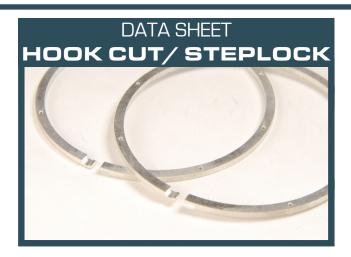

FEATURES

- Chamfer
- Groove
- Radius
- Vent

COATINGS

- Manganese Phosphate
- Electroless PTFE/Nickel
- Tin & Tin Nickel
- Chrome
- Silver Lead Indium

APPLICATIONS

- Transmission
- Torque Converter Pumps

Questions? Comments? Support?

Please call (414)716-5900 or email our customer support team at sales@GroverCorp.com to get answers to any questions you might have!

Grover's Customer Service Team, Engineers and Designers are here to assist you with.